

MARSHFIELD HIGH SCHOOL LIBRARY REROOF

COOS BAY SCHOOL DISTRICT
972 INGERSOLL AVE
COOS BAY, OR 97420

PROJECT TEAM

OWNER
COOS BAY SCHOOL DISTRICT
333 S. 10TH ST.
COOS BAY, OR 97420
PHONE: (541) 267 3104
CONTACT: LOMA LANEY

ARCHITECT
HGE ARCHITECTS, INC.
333 S. 4TH ST.
COOS BAY, OR 97420
PHONE: (541) 269 1166
CONTACT: DOMINIC LIBRIE

SHEET INDEX

A2.1 OVERALL & ROOF PLANS
A2.2 DETAILS

ABBREVIATIONS

AB	ANCHOR BOLT
ALT	ALTERNATE
CONC	CONCRETE
CONT	CONTINUOUS
COMP	COMPOSITION
DIMS	DIMENSIONS
EA	EACH
EW	EACH WAY
MANUF	MANUFACTURER
MIN	MINIMUM
OC	ON CENTER
PERF	PERFORATED
PT	PRESSURE TREATED
REQ'D	REQUIRED
RO	ROUGH OPENING
SAMF	SELF-ADHERED MEMBRANE FLASHING
SIM	SIMILAR
S.S.	STAINLESS STEEL
TYP	TYPICAL
VIF	VERIFY IN FIELD
WRB	WATER RESISTIVE BARRIER
w/	WITH
o/	OVER
@	AT
&	AND
∅	DIAMETER


GENERAL NOTES:

- EXISTING ROOF STRUCTURE IS 20" OPEN WEB STEEL JOISTS @ 30" O.C. WITH 1/2" / 12" SLOPE TO (E) ROOF DRAIN LOCATIONS.
- EXISTING 2-3/4" R-19 INSULATION TO BE RE-USED. VERIFY AND PROVIDE TAPERED INSULATION TO ACHIEVE 1/2" / 12" MIN. SLOPE FOR DRAINAGE.
- ASSUME 250 FT² OF 5/8" PLYWOOD SHEATHING REPLACEMENT, PROVIDE UNIT COST FOR ADDITIONAL.
- ASSUME 500 FT² REPLACEMENT OF 2-3/4" R-19 INSULATION, PROVIDE UNIT COST FOR ADDITIONAL.


REMOVE (E) SINGLE-PLY ROOFING & 2-3/4" R-19 RIGID POLYISOCYANURATE INSULATION FOR REUSE. INSPECT & CORRECT ROOF DECK AS REQUIRED. INSTALL VAPOR BARRIER, RE-INSTALL (E) INSULATION AND REPLACE BOARDS AS NEEDED.

TYPICAL ROOF ASSEMBLY:

- (E) PLYWOOD SHEATHING (5/8" / 12" SLOPE)
- VAPOR BARRIER
- (E) 2-3/4" R-19 POLYISO INSULATION
- 1/2" / 12" TAPERED POLYISO INSULATION
- 1/2" ROOF COVER BOARD PER MANUFACTURER
- SINGLE PLY ROOFING MEMBRANE

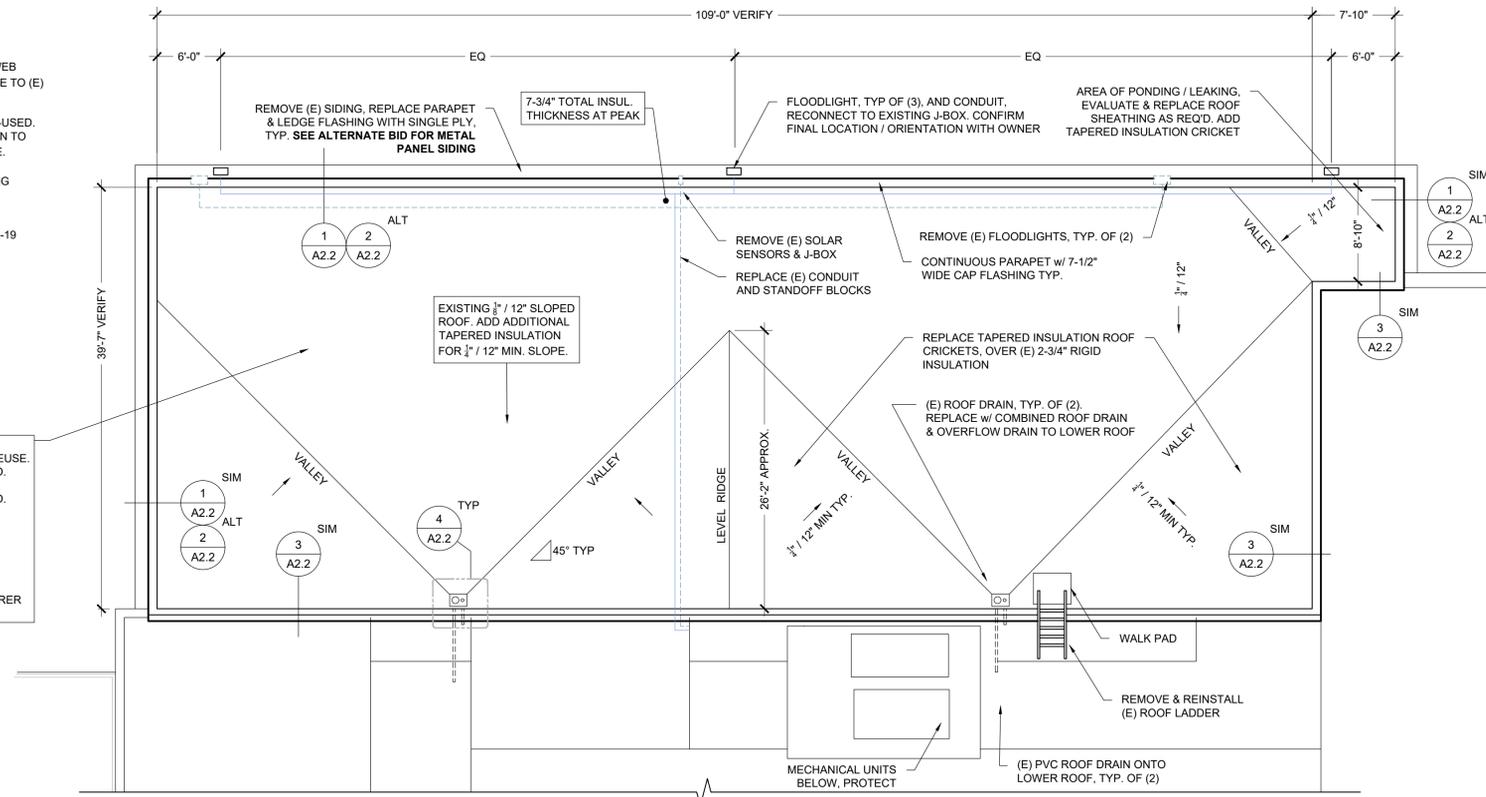

2 ENLARGED ROOF PLAN
A2.1 1/8" = 1' - 0"

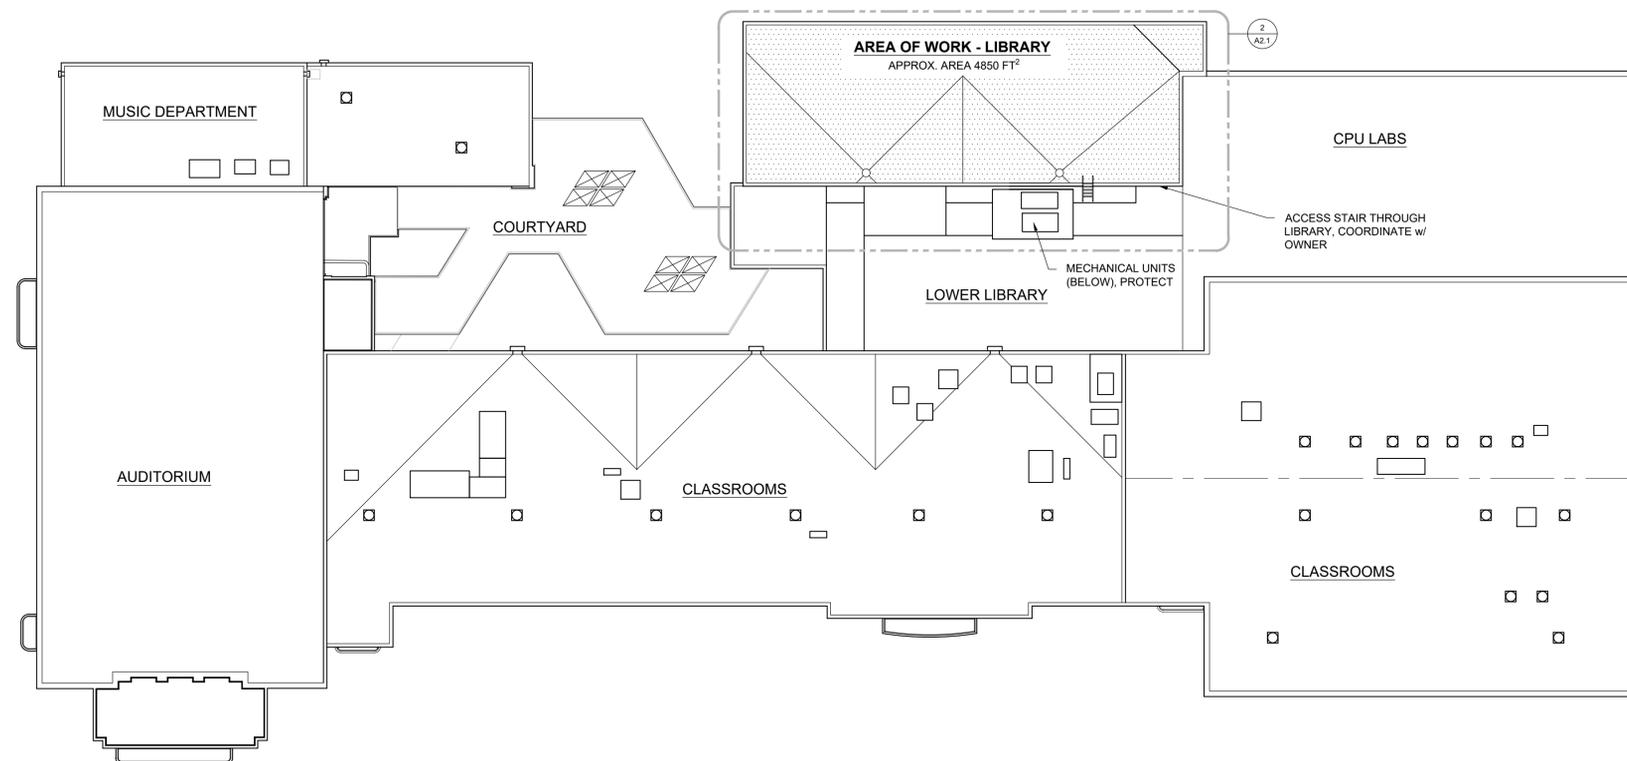

1 OVERALL ROOF PLAN - MHS MAIN BUILDING
A2.1 3/64" = 1' - 0"

CONSTRUCTION

REVISIONS:
DATE DESCRIPTION

DATE: MAR 2026

SHEET TITLE:
OVERALL & ROOF PLANS

CONSTRUCTION

REVISIONS:

#	DATE	DESCRIPTION

DATE: MAR 2026

SHEET TITLE:
DETAILS

A2.2

